

Ultra-Lux 300W





Features:

- High lumen
- Easy combination
- Adjustable module
- IP66 & IK10

Areas of application:

Large stadiums, Airports, Parking lots, Terminals, Tennis court, Golf course, Power stations, Commercial parks etc.

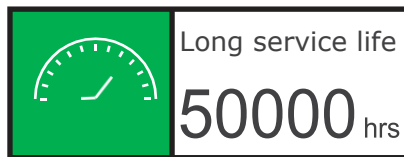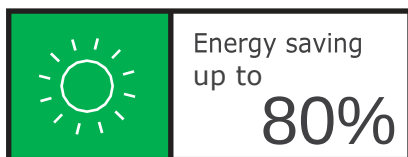

1 Parameter



Wattage	CRI	Power Factor
300W	Ra>70/80	>0.95
Operating Temp	IP & IK Grade	Luminous Flux
-40℃ ~55℃	IP66 & IK10	51,000LM ± 5%
Beam Angle	Rated Voltage	
30°/60°/90° Asymmetric G4	AC 100-240V 277V~, 50/60Hz	

2 Beam angle



30°



60°




90°




Asymmetric G4

3 Installation


① Ground Installation




② Wall Installation




③ Pole Installation

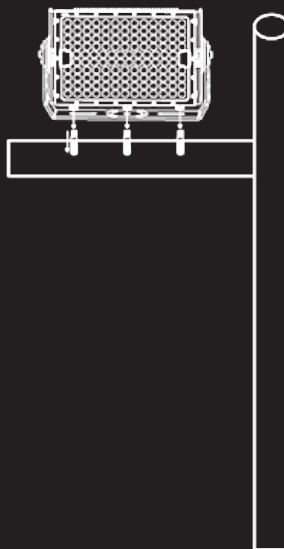

④ Ceiling Installation



4 Dimensions

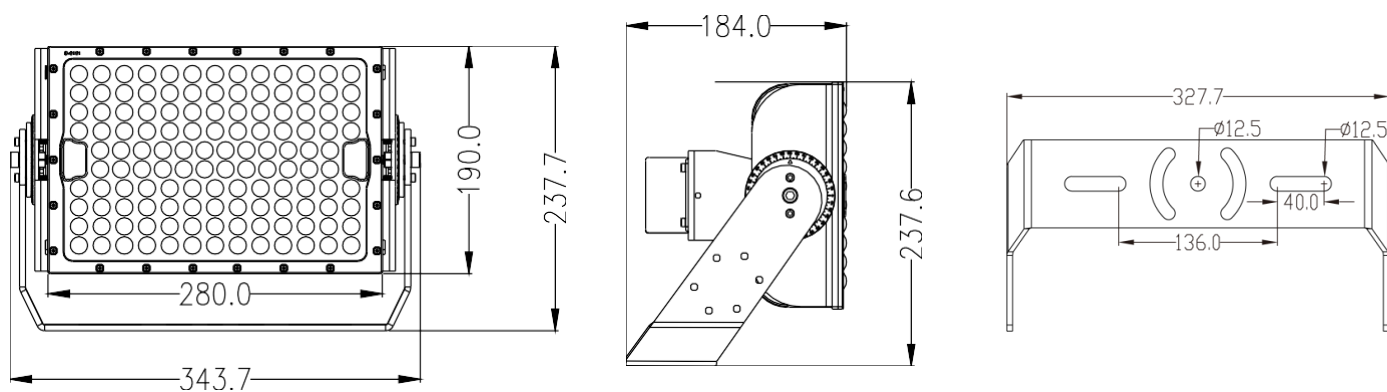

5 Packaging

Net weight	Size of Box	Weight of Box
6.0 KG	39*29.5*23.5cm	6.6 KG