

XLT-100W

170LM/W





Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP66

Areas of application:

Garages / Public area / Factory / Warehouse / Stadium / Sports ground / etc.

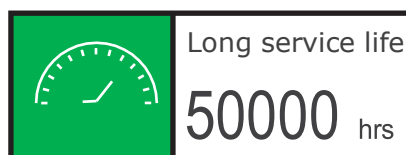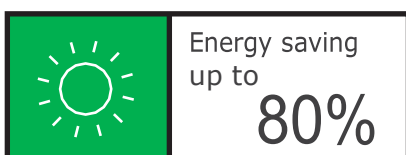

1 Parameter



Wattage	CRI	Power Factor
100W	Ra>70	>0.95
Operating Temp.	IP Grade	Luminous Flux
-40°C ~ +60°C	IP66	17,000LM
Beam Angle	Rated Voltage	
10°/ 30° /60° /90°/120°	AC 100-240V 277V~ 50/60Hz	

2 Beam angle

Multiple angles are available.



10°




30°



60°




90°



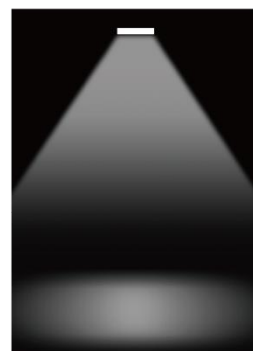


120°

3 Installation

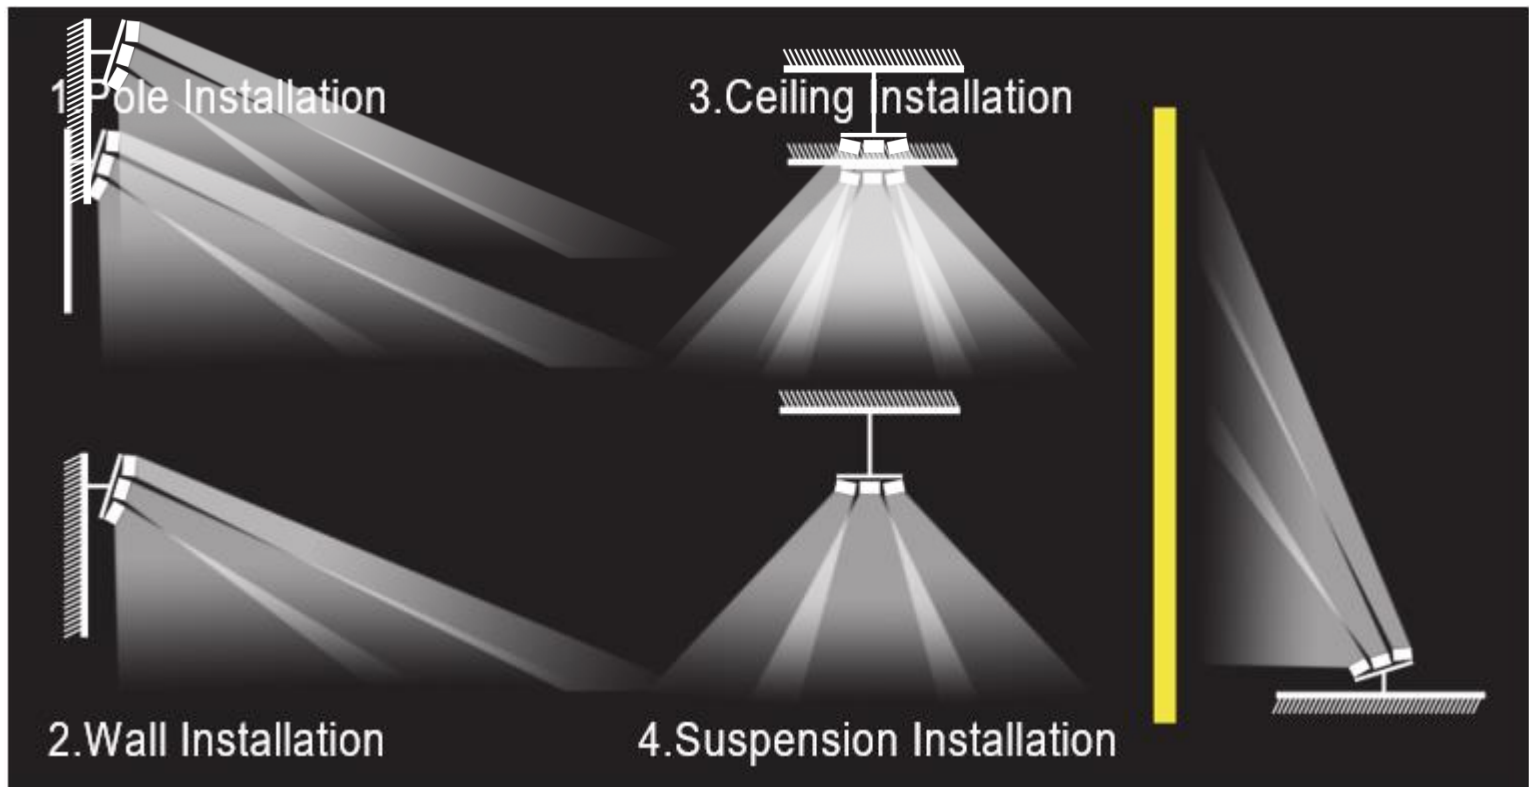

4 Dimensions

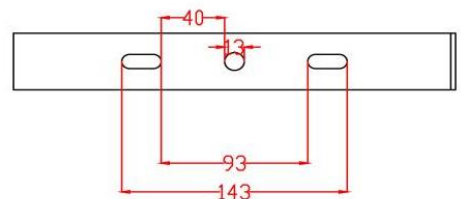

5 Packaging

Net weight	Size of Box	Weight of Box
2.9KG	32*13*29 CM	3.5KG