

XLT-150W ON TOP 170LM/W





Features:


- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP66

Areas of application:

Industrial area / Parking lot / Harbor / Warehouse /
Horse arena/ Sports field/ Construction site etc.

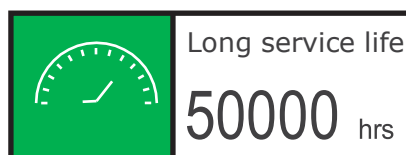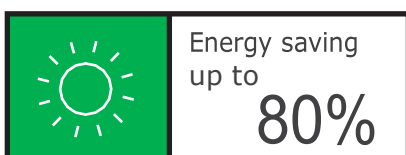

1 Parameter

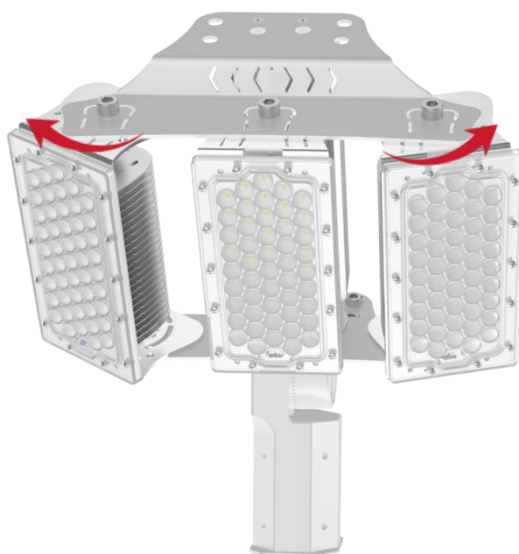

Wattage	CRI	Power Factor
150W	Ra>80	>0.95
Operating Temp	IP Grade	Luminous Flux
-40°C ~ +60°C	IP66	25,500LM
Beam Angle	Rated Voltage	Pole Size
30°/60°/90°/120°	AC 100-240V 277V~ 50/60Hz	60/80mm

2 Beam angle

Multiple angles are available.




30°



60°




90°

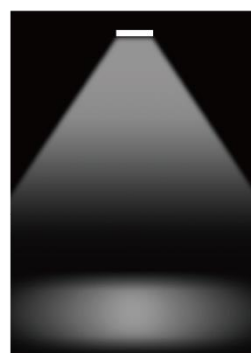


120°

3 Installation

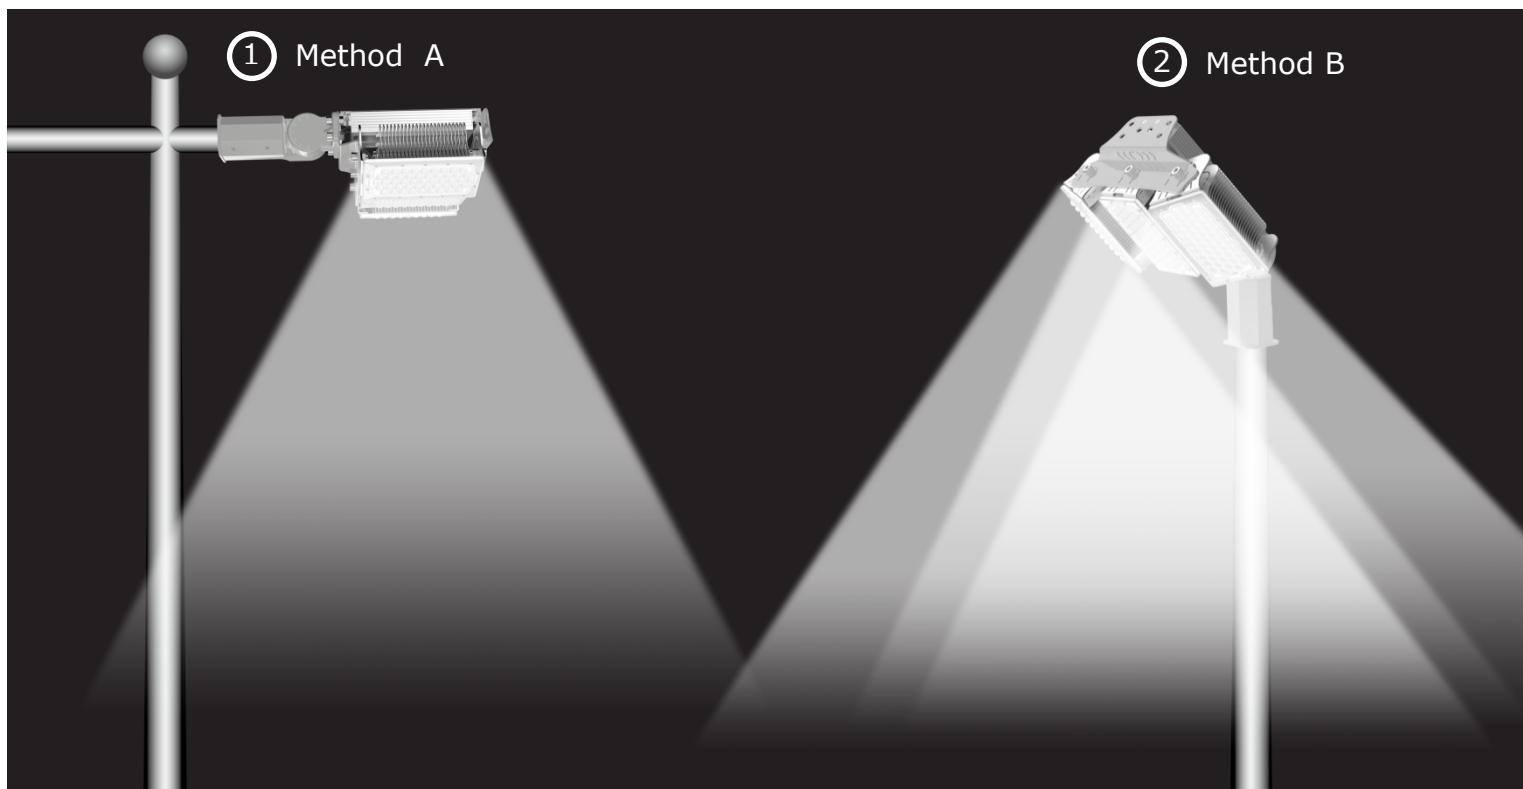

4 Dimensions

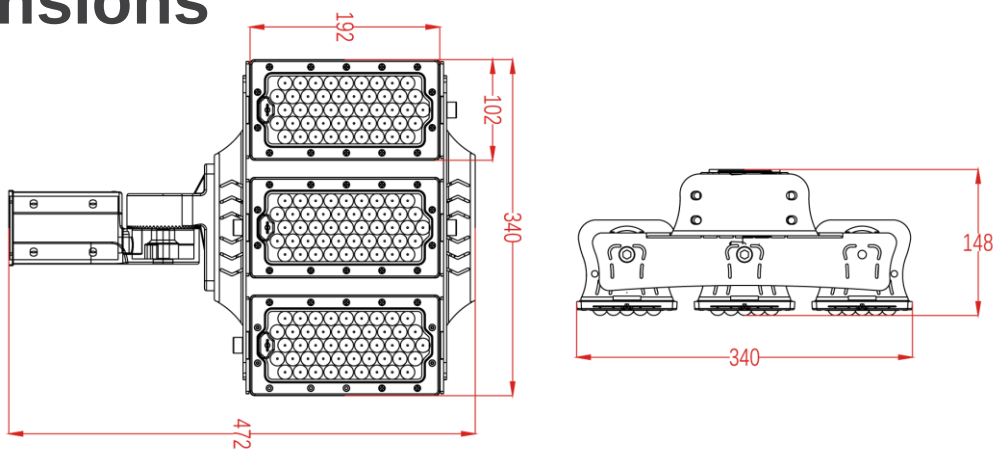

5 Packaging

Net weight	Size of Box	Weight of Box
6.3KG	43*41*23CM	6.9KG