

D04G-100W

150LM/W




Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP65

Areas of application:

Sports field / Workshop / Warehouse / Construction plant / Park / Petrol station / Diggings / Shopping Malls / etc.

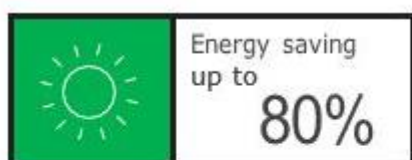

Energy saving
up to
80%



Long service life
50000 hrs



Maintenance
long life
Free

1 Parameter



Wattage

100W

CRI

Ra>70

Power Factor

>0.95

Operating Temp.

-40°C ~ +60°C

IP Grade

IP65

Luminous Flux

15,000LM





Beam Angle

X-135°, Y-65°
30°/60°/120°


Rated Voltage

AC 100-240V 277V~
50/60Hz


2 Beam angle

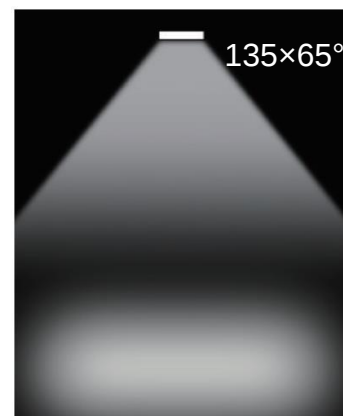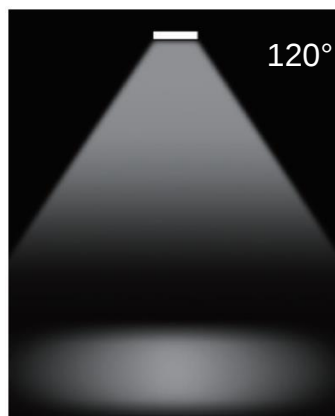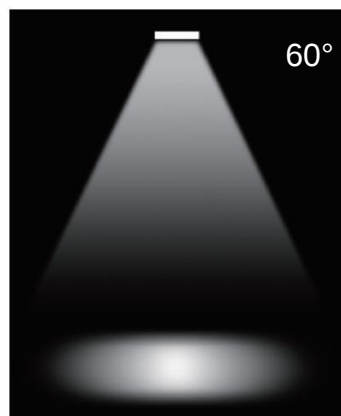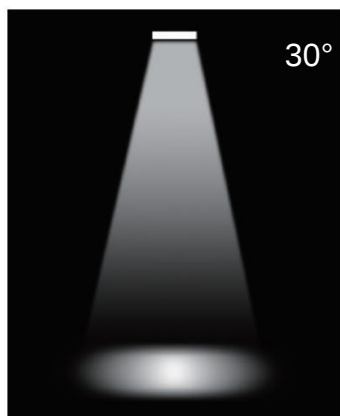


3 Installation

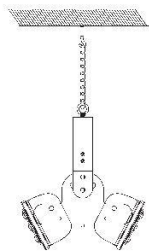


Suspended installation



Wall installation





Ground installation



Ceiling installation

4 Dimensions



5 Packaging

Net weight	Size of Box	Weight of Box
3.5KG	31*29*27CM	4.0KG