

Gevel-Lux 100W

160LM/W





Features:


- Wide range of illumination
- Ultra-lightweight
- Easy to install
- IP66 & IK10

Areas of application:

Factory, Warehouse, Industrial site, Harbor, Parking area, storage boxes, Storage yard etc.

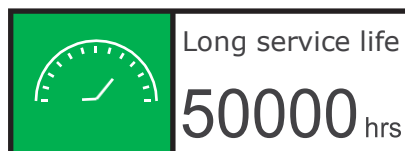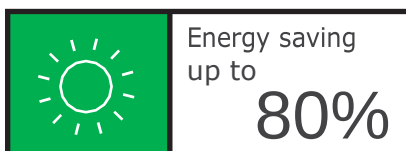


1 Parameter

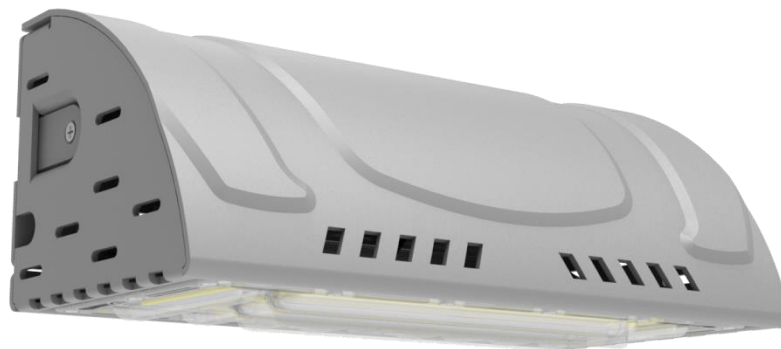


Wattage	CRI	Power Factor
100W	Ra>70/80	>0.95
Operating Temp	IP&IK Grade	Luminous Flux
-40℃ ~60℃	IP66 & IK10	16,000LM
Beam Angle	Rated Voltage	
Asymmetric G6	AC 100-240V 277V~, 50/60Hz	

2 Beam angle

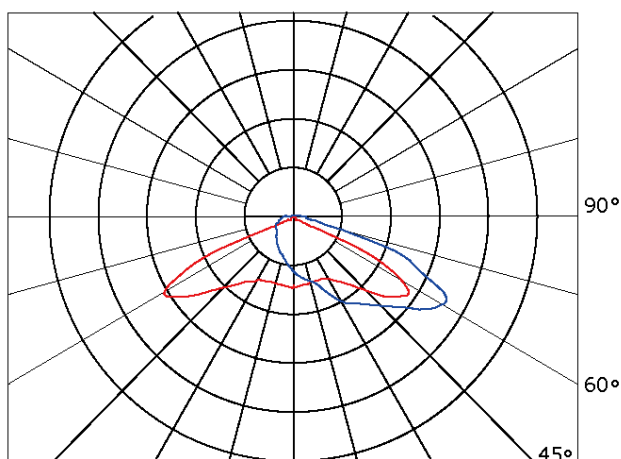

Asymmetric G6

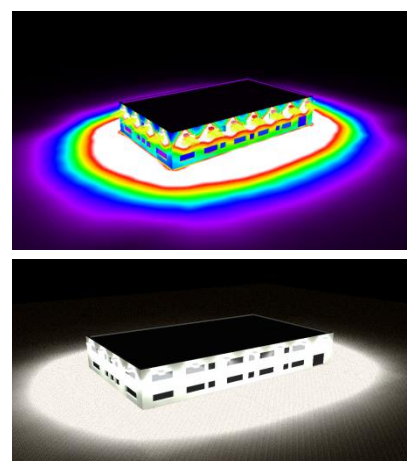


Dialux Simulation



3 Installation



Wall Installation

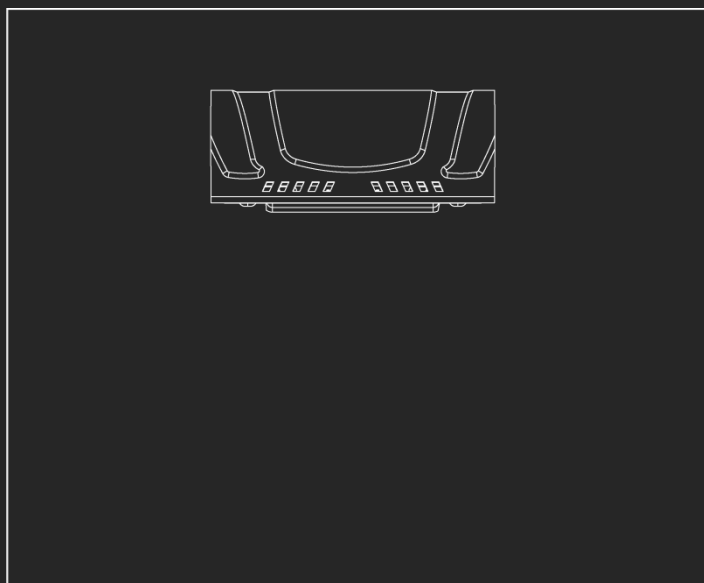

4 Dimensions

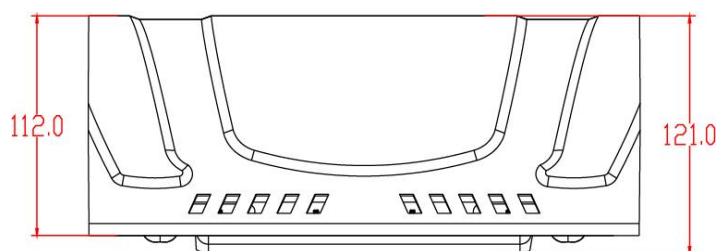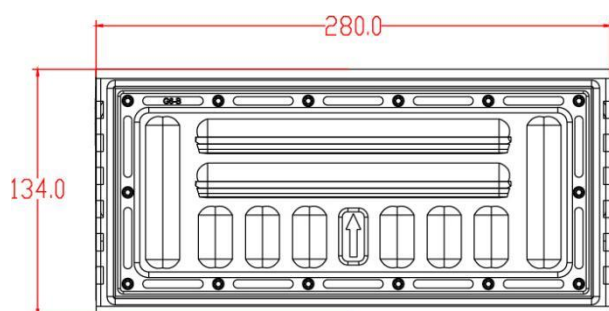

5 Packaging

Net weight	Size of box	Weight of box
1.7 KG	31*18.5*17.5cm	2.0 KG