

Amstel-Lux 100W

165LM/W





Features:

- High lumen
- Split Cooling System
- Low Wind Resistance Design
- NEMA Socket Compatible
- IP66 & IK10 & 10KV

Areas of application:

Community Street / Parking area / Industrial site / Harbor /
Storage site/ Horse arena/ Park

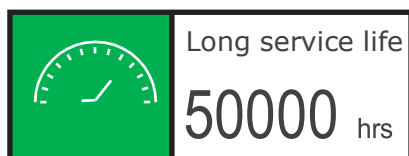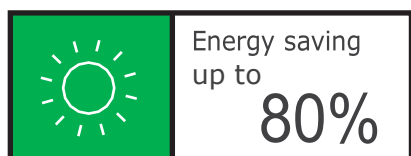

RoHS

1 Parameter




Wattage	CRI	Power Factor
100W	Ra>80	>0.95
Operating Temp	IP Grade	Luminous Flux
-40°C ~ 60°C	IP66	16,500LM
Beam Angle	Rated Voltage	
G7/G7-FT/G7-UW	AC100-240V 277V~, 50/60Hz	


2 Beam angle



G7

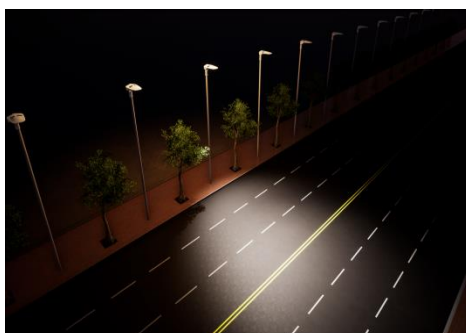


G7-FT
(Forward Throw)

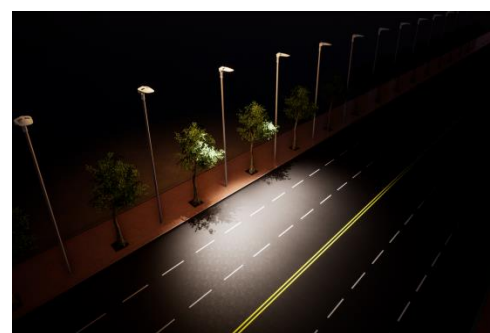


G7-UW
(Ultra Wide)

3 Installation

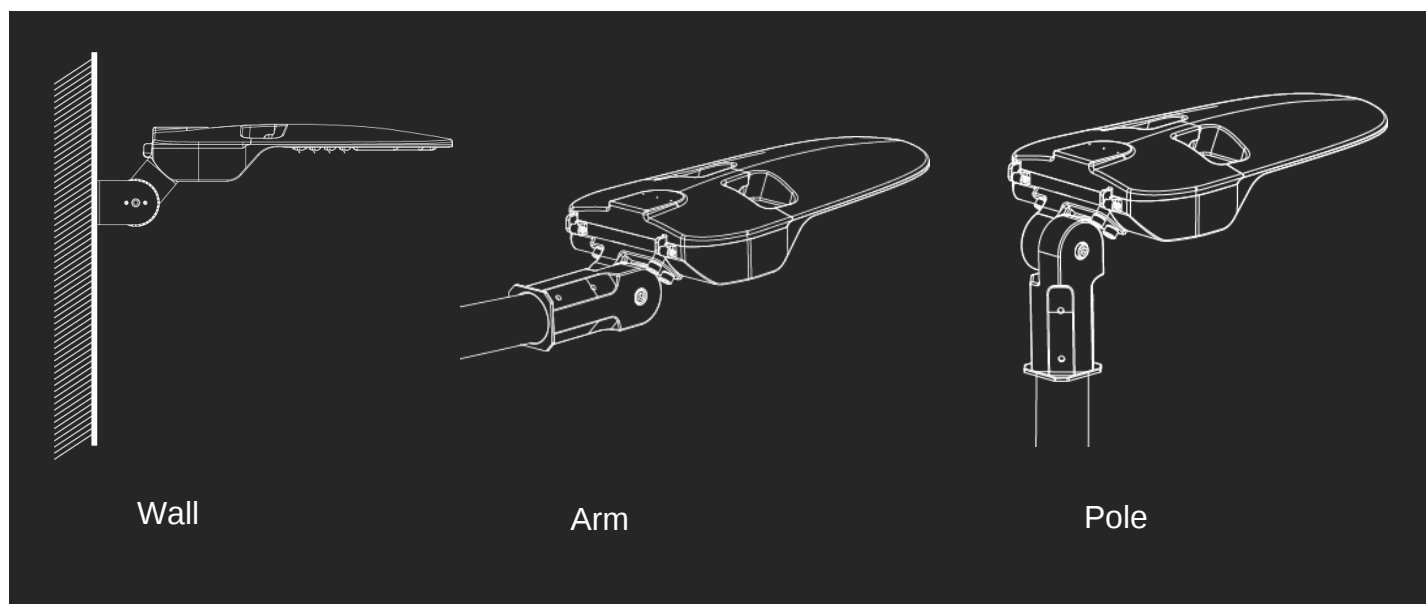

4 Dimensions

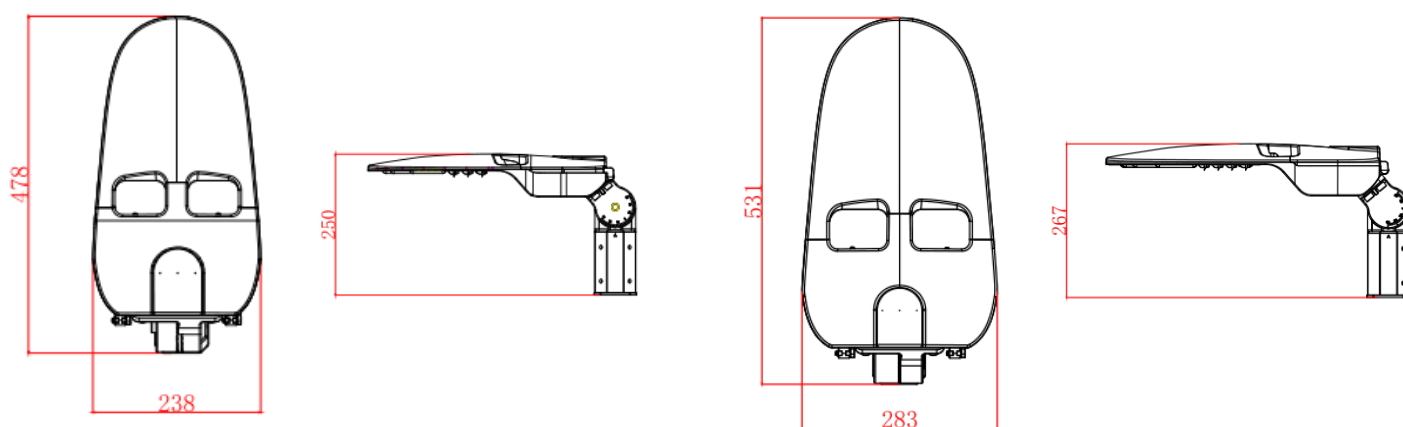

5 Packaging

Net Weight	Product Size	Size of Box	Cross Weight
4.7KG	478x238x250mm	550*310*235mm	6.2KG