

VOC-GTS

bedrijfshal LED



armatuur met

NANO coating



VOC-GTS-80W	VOC-GTS -100W	VOC-GTS -150W
12,800LM±5%	16,000LM±5%	24,000LM±5%
3.6kg±5%	3.8kg±5%	3.8kg±5%
380x63mm	380x63mm	380x63mm

VOC-GTS -200W	VOC-GTS -240W
32,000LM±5%	38,400LM±5%
5.6kg±5%	5.6kg±5%
500x68mm	500x68mm

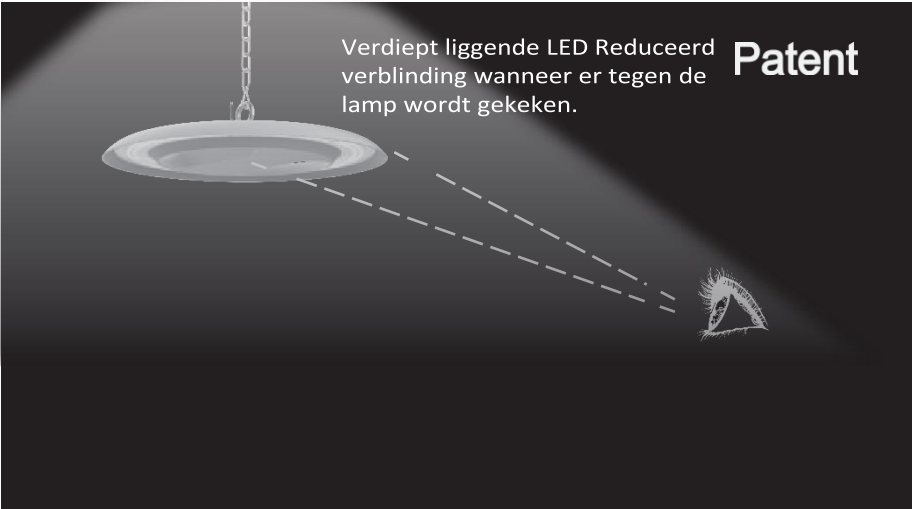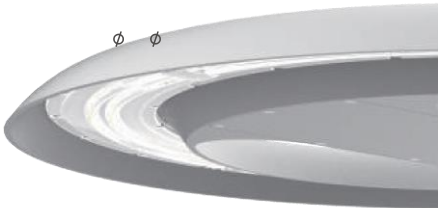

| Specificatie

WATTAGE	80/100/150/200/240W
DRIVER	MEANWELL
LAMP LUMINOUS FLUX	160LM/W
LICHT BRON	Philips/LUMILEDS
CRI	Ra>70/80
CCT	4500 6500K
VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
Lichthoek	60°/90°/120°
Waterdichtheid	IP66
Bedrijfs temperatuu	-40°C~55°C
	NANO ccoating grijs



