

## Gevel-Lux 150W 160LM/W





### Features:


- Wide range of illumination
- Ultra-lightweight
- Easy to install
- IP66 & IK10

### Areas of application:

Factory, Warehouse, Industrial site, Harbor, Parking area, Storage boxes, Storage yard etc.

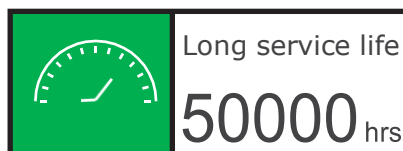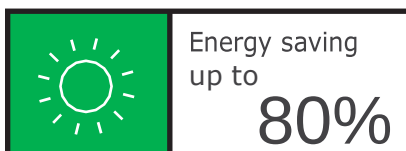


## 1 Parameter

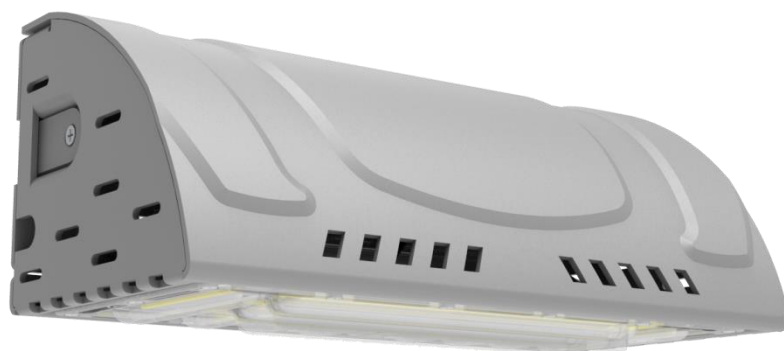


| Wattage        | CRI                           | Power Factor  |
|----------------|-------------------------------|---------------|
| 150W           | Ra>70/80                      | >0.95         |
| Operating Temp | IP&IK Grade                   | Luminous Flux |
| -40℃ ~60℃      | IP66 & IK10                   | 24,000LM      |
| Beam Angle     | Rated Voltage                 |               |
| Asymmetric G6  | AC 100-240V 277V~,<br>50/60Hz |               |

## 2 Beam angle

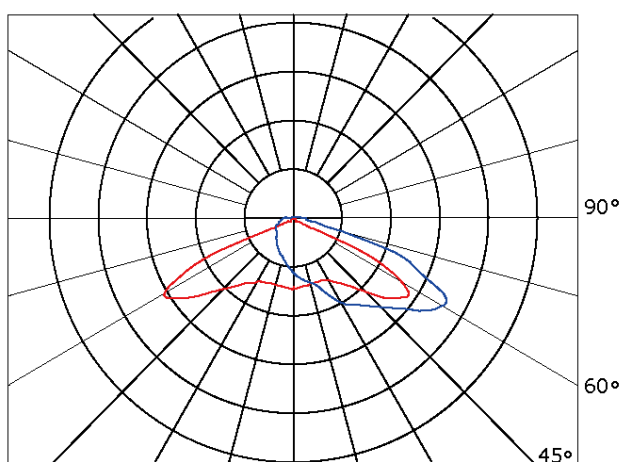

**Asymmetric G6**

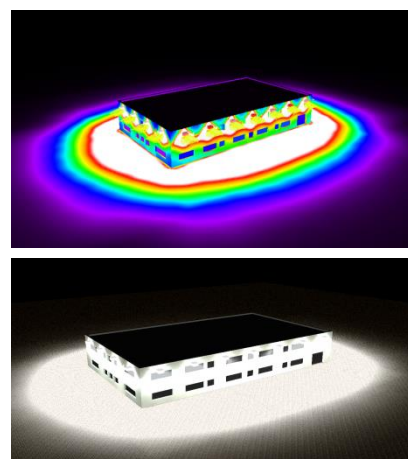


**Dialux Simulation**

## 3

## Installation





Wall Installation

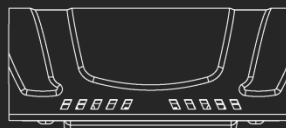

## 4

## Dimensions

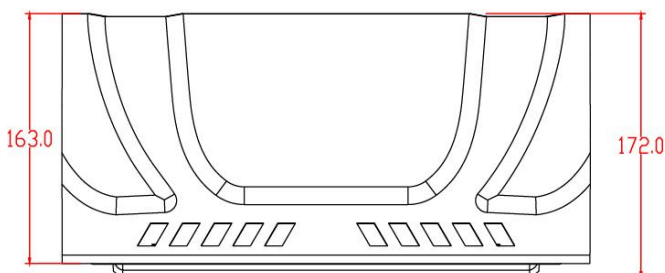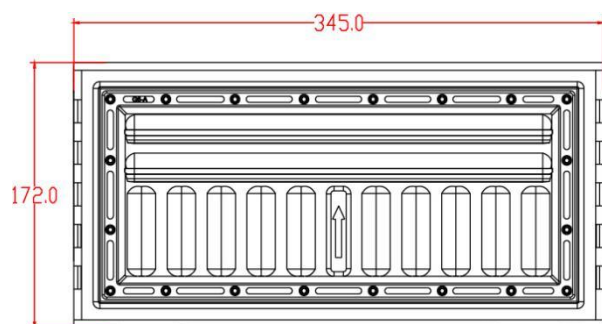

## 5

## Packaging

| Net Weight     | Size of Box  | Weight of Box  |
|----------------|--------------|----------------|
| 2.8KG $\pm$ 5% | 37.5*22*23cm | 3.2KG $\pm$ 5% |