

Amstel-Lux 50W 165LM/W





Features:

- High lumen
- Split Cooling System
- Low Wind Resistance Design
- NEMA Socket Compatible
- IP66 & IK10 & 10KV

Areas of application:

Street / Community Street / Parking Lot / Public Area /
Outdoor Billboard / Park

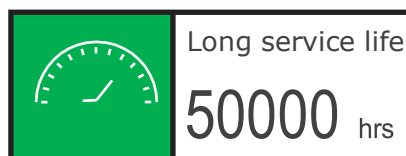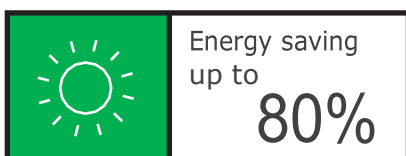

RoHS

1 Parameter




Wattage	CRI	Power Factor
50W	Ra>70/80	>0.95
Operating Temp	IP Grade	Luminous Flux
-40°C ~ 60°C	IP66	8,250LM
Beam Angle	Rated Voltage	
G7/G7-FT/G7-UW	AC100-240V 277V~, 50/60Hz	

2 Beam angle



G7

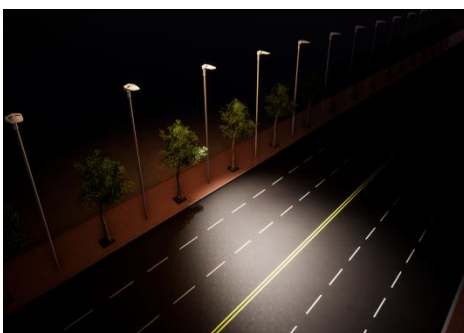


G7-FT
(Forward Throw)




G7-UW
(Ultra Wide)

3 Installation

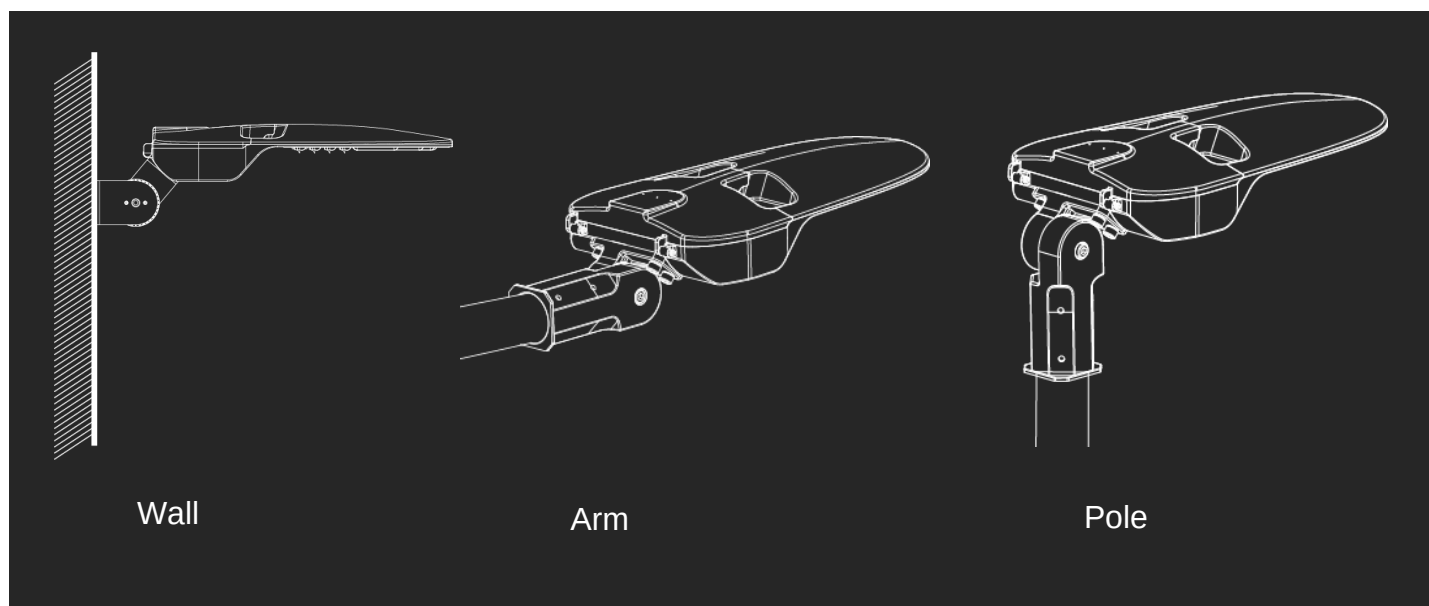

4 Dimensions

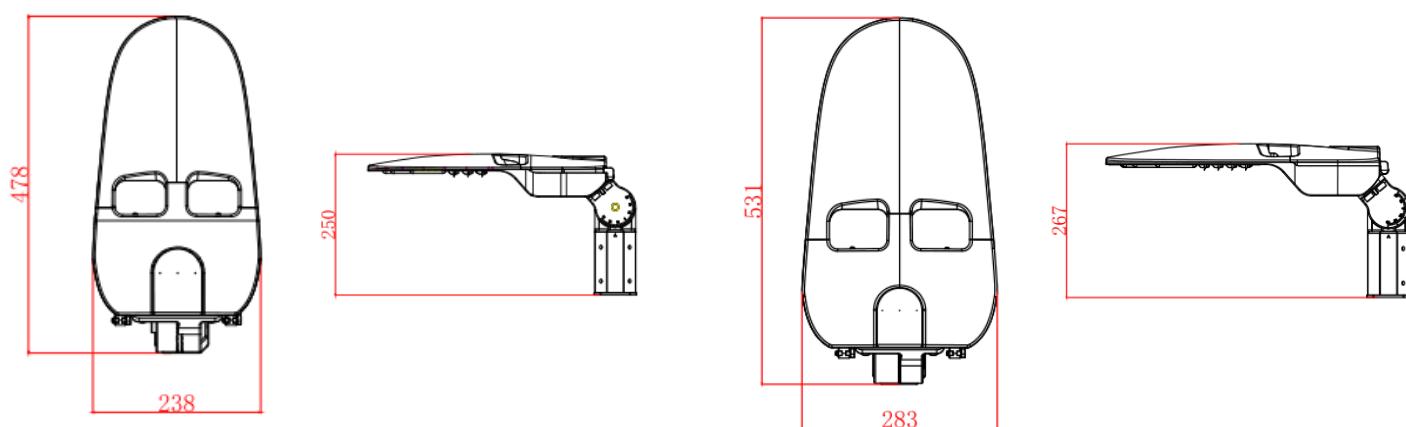

5 Packaging

Net weight	Size of box	Weight of box
4.6KG	47*24*25CM	5.3KG