


Aluminium column SAL-40CAM

120 mm at the base plate

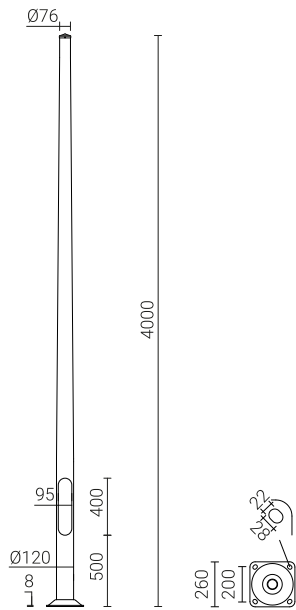

TECHNICAL DATA

Anodising	10 colours
Packing	sleeve material
Diameter at the base plate	120 mm
Purpose	for mounting surveillance cameras
Finish	brushed anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Ingress protection	IP54 for wire chamber
Ending	aluminum cap anodized in the color of the columns included
Diameter of the column ending	ø76 mm



TABLE OF VARIANTS

Code	Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement/ basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42842	42842/C...	SAL-40CAM	4 m	4 mm	0.124 m³	B-51 / Z-51	311151 / 311251	4008	15.7 kg

STRENGTH TABLE

ANODISING COLOURS

