

Multi-Beam-100W 160LM/W





Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP65

Areas of application:

Garages / Exhibition hall / Factory / Warehouse /
Gymnasiums / Shops / etc.

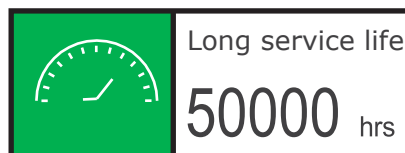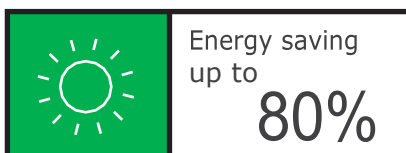

1 Parameter



Draaibare modules voor een optimale lichtverdeling

Wattage	CRI	Power Factor
100W	Ra>70/80	>0.95
Operating Temp.	IP Grade	Luminous Flux
-40°C ~ +60°C	IP65	16,000LM ± 5%
Beam Angle	Rated Voltage	
60°/120°	AC 100-240V 277V~, 50/60Hz	

2 Beam angle

Multiple angles are available.




60°



120°

3 Installation


1.Pole Installation

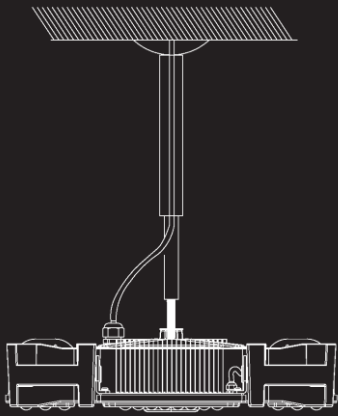

Optional accessories 1
Extension aluminium pole





2.Chain Installation

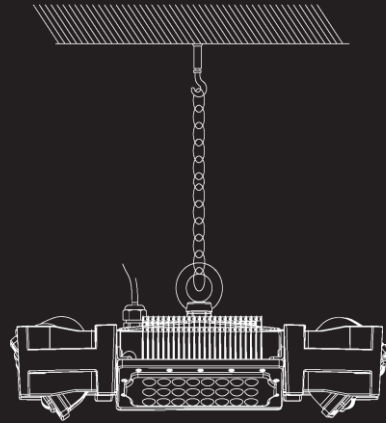

Optional accessories 2
Iron chain



4 Dimensions

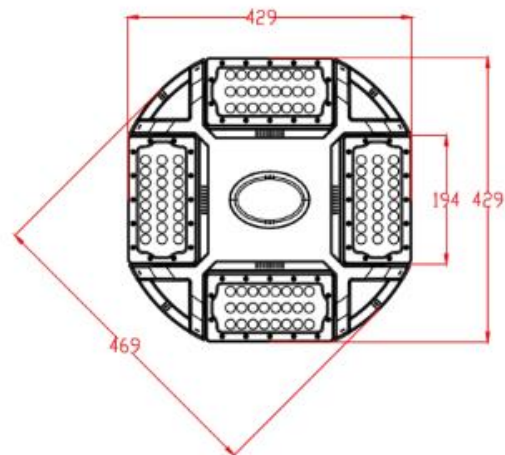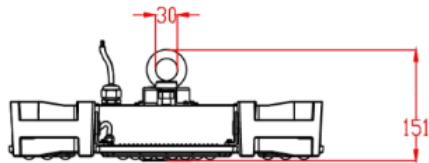

5 Packaging

Net weight	Size of Box	Weight of Box
4.5KG	47*46*15CM	5.3KG