



LED High Bay Light

VOC-GTS-100W

165LM/W





Features:

- High lumen
- Waterproof
- Transmittance>94%
- Hydrophobic surface
- IP Grade: IP66

Areas of application:

Warehouse, industrial facility, exhibition centers, shopping malls, hangar, public area etc.

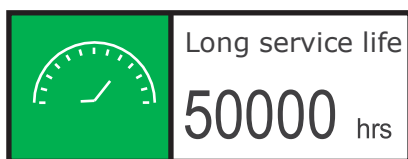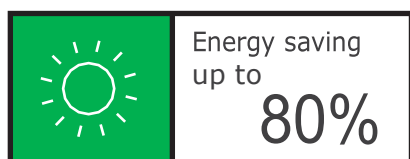


1 Parameter



Wattage	CRI	Power Factor
100W	Ra>70/80	>0.95
Operating Temp	IP Grade	Luminous Flux
-40°C ~ 55°C	IP66	16,500LM±5%
Beam Angle	Rated Voltage	
60°/90°/120°	AC100-240V 277V~, 50/60Hz	

2 Beam angle

Multiple angles are available.

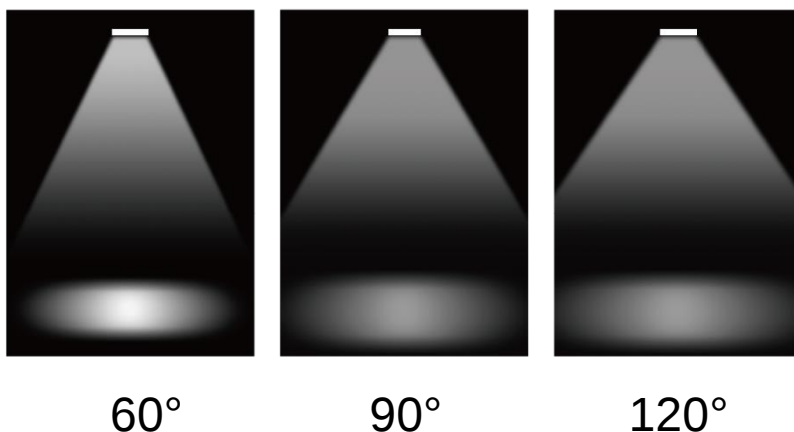

60°

90°


120°

3 Installation




1.Ceiling Installation



2.Suspension Installation

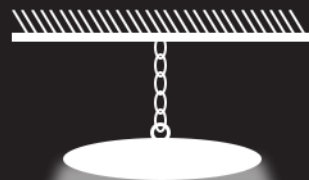

4 Dimensions

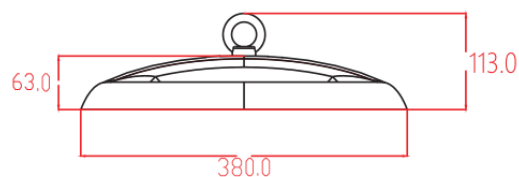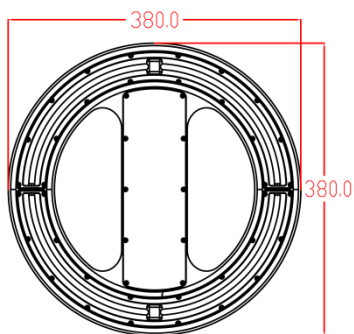

5 Packaging

Net Weight	Size of Box	Weight of Box	Size of Carton	Gross Weight	Box PCS / Carton
3.8KG	44*43*19cm	4.7KG	45*45*77cm	19.8KG	4