

D04G-100W

160LM/W




Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP66

Areas of application:

Sports field / Parking lot / Warehouse / Construction site / Factory / Petrol station / Harbor / Loading dock etc.




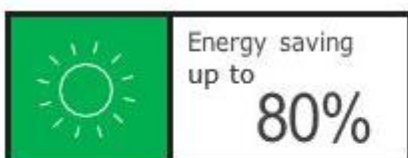


1 Parameter




Wattage	CRI	Power Factor
100W	Ra>70	>0.95
Operating Temp.	IP Grade	Luminous Flux
-40°C ~ +60°C	IP66	16,000LM
Beam Angle	Rated Voltage	
X-135°, Y-65° 30°/60°/120°	AC 100-240V 277V~ 50/60Hz	


2 Beam angle

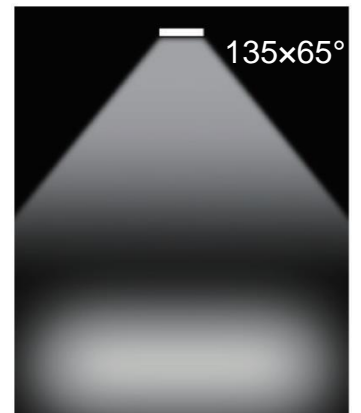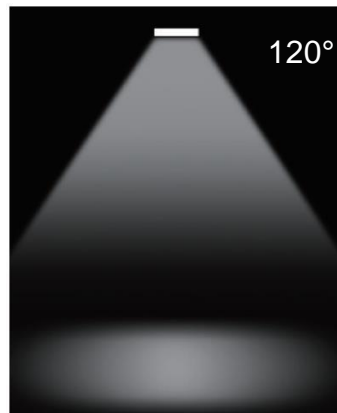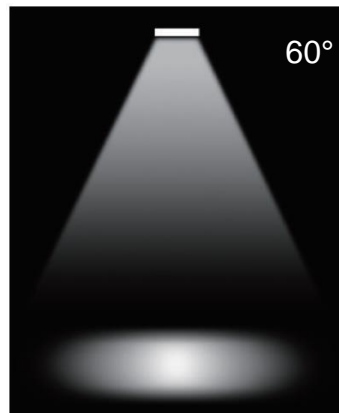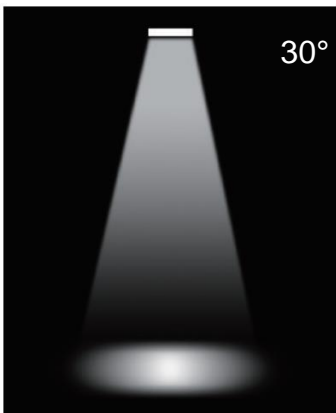


3 Installation

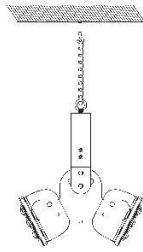


Suspended installation



Wall installation





Ground installation



Ceiling installation

4 Dimensions



5 Packaging

Net weight	Size of Box	Weight of Box
3.5KG	31*29*27CM	4.0KG